

# TRAILER HITCH MOUNTING INSTRUCTIONS

CATALOG NUMBER.....247385  
APPLICATION.....Honda S2000 Roadster

HITCH CAPACITY.....2000 pounds gross trailer weight 200 pounds maximum tongue load OR the maximum load specified by the vehicle manufacturer; WHICHEVER IS LESS.

- NOTES: A. This hitch features a removable ball mount. This hitch is not intended for use as a weight distributing hitch. Before towing, the hitch pin and retainer clip **MUST** be in place securing ball mount to receiver.  
B. This product complies with safety specifications and requirements for connecting devices and towing systems of the state of New York and regulation V.E.S.C. V-5.

1. General Fit: This hitch mounts to vehicle at the bottom surface of bumper brackets above the exhaust tips on left and right sides and to the bottom of the trunk floor.
2. Place hitch in position centered on the vehicle and mark the bottom surface of bumper brackets for holes ①.
3. Center punch and drill holes ① 1/2" diameter thru bottom surface of brackets. Using the fish wire method, pull 7/16" carriage bolt with #907 backing plate into holes ① from inside bumper brackets accessing, at opening at rear of brackets inside bumper channel. See figure A
4. Using washers and nuts called out at ①, bolt hitch in position at ① being careful not to push carriage bolts back into frame.
5. Clear trunk area for drilling. Using hitch as a guide, drill trunk floor four places for 3/8" diameter screws. Fasten hitch at trunk floor using fasteners ②. Screws are placed from the inside with large diameter fender washers at each.
6. Final tighten all fasteners as specified on reverse of these instructions. Recheck fasteners occasionally.

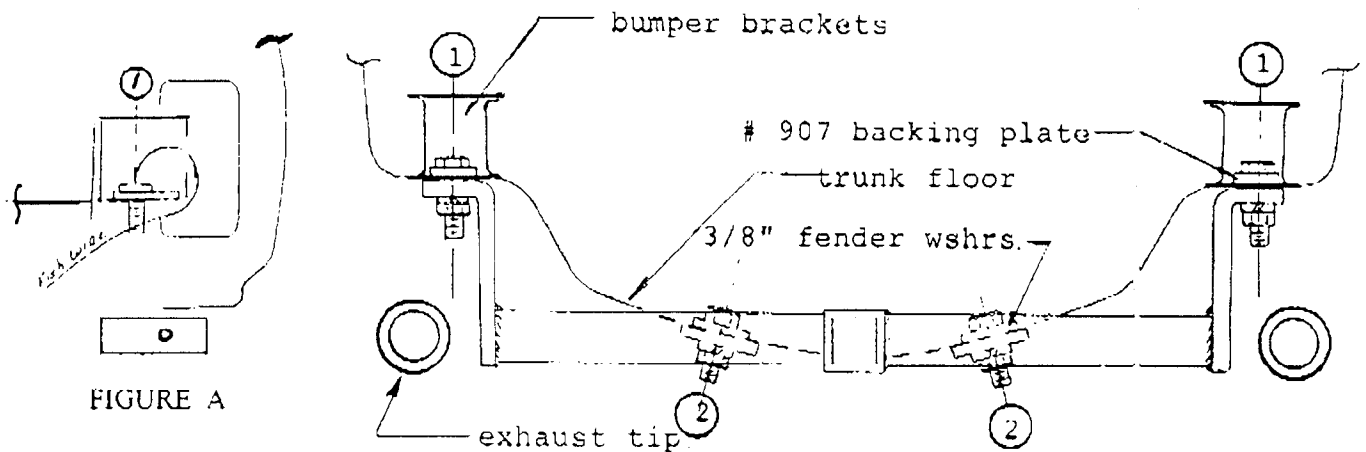


FIGURE A

REAR VIEW - BUMPER NOT SHOWN

## FASTENERS:

- |                                  |                                  |
|----------------------------------|----------------------------------|
| ① (2) 7/16x 1 1/2" Carriage bolt | ② (4) 3/8x 1 1/4" screw          |
| (2) # 907 backing plate, 7/8x 2" | (4) 3/8" fender washer (2" O.D.) |
| (2) 7/16" lock washer            | (4) 3/8" lock washer             |
| (2) 7/16" hex nut                | (4) 3/8" hex nut                 |

DATE: 11/02/00 A

USE BALL MOUNT: #55040

**CAUTION:** Hitch will accomodate 2 place (max.) bike racks. Available stabilizing cord **MUST** be used between rack and vehicle