


GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 3,500 LBS. TRAILER WEIGHT & 350 LBS. TONGUE WEIGHT.

DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	7/16"	CONICAL TOOTHED WASHER
2	8	HFN3816	HEX FLANGE NUT
3	8	3/8-16 X 1 1/2	HEX BOLT
4	2	7/16-14 x 1 1/4	HEX BOLT
5	8	3/8"	WASHER

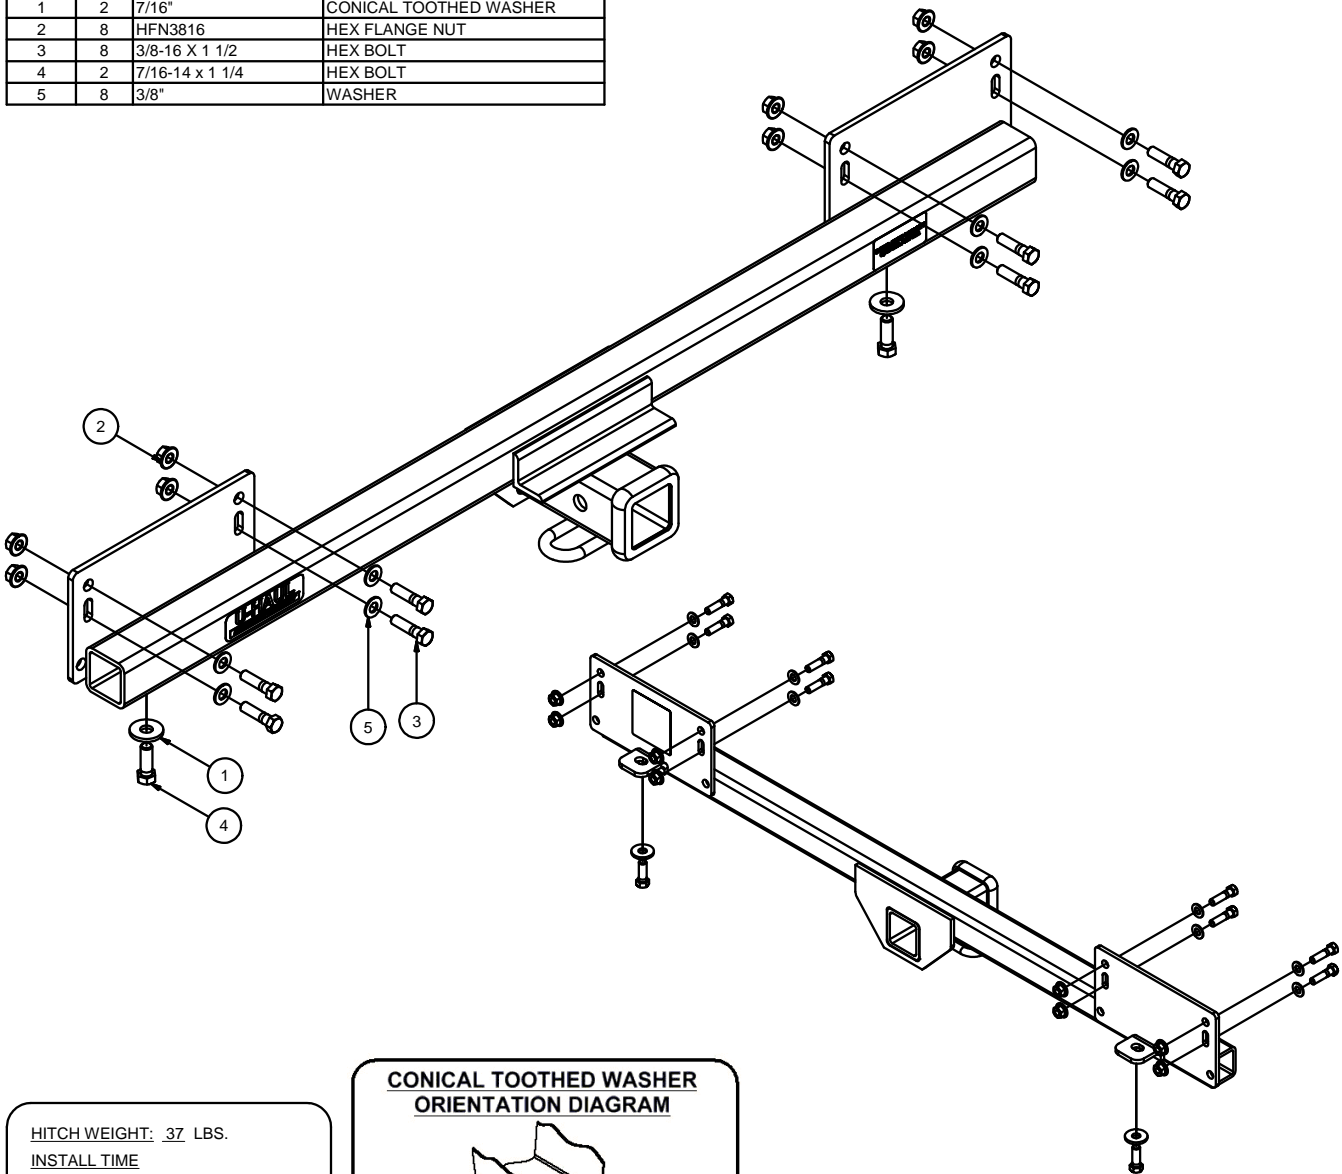

HITCH WEIGHT: .37 LBS.

INSTALL TIME


PROFESSIONAL: 20 MINUTES

NOVICE (DIY): 40 MINUTES

INSTALL NOTES:

-NO DRILLING REQUIRED

**CONICAL TOOTHED WASHER
ORIENTATION DIAGRAM**

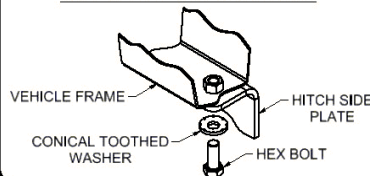

INSTALLATION STEPS

1) LOCATE EXISTING HOLES IN FRAME. RAISE THE HITCH INTO POSITION AND INSTALL FASTENERS AS SHOWN.

2) CHECK AND TIGHTEN ALL FASTENERS AS SPECIFIED BELOW:

- TORQUE ALL 3/8" HARDWARE TO 45 FT-LBS.
- TORQUE ALL 7/16" HARDWARE TO 70 FT-LBS.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.